


MIPOLAM® STYL


gerflor.com
gerflor.asia

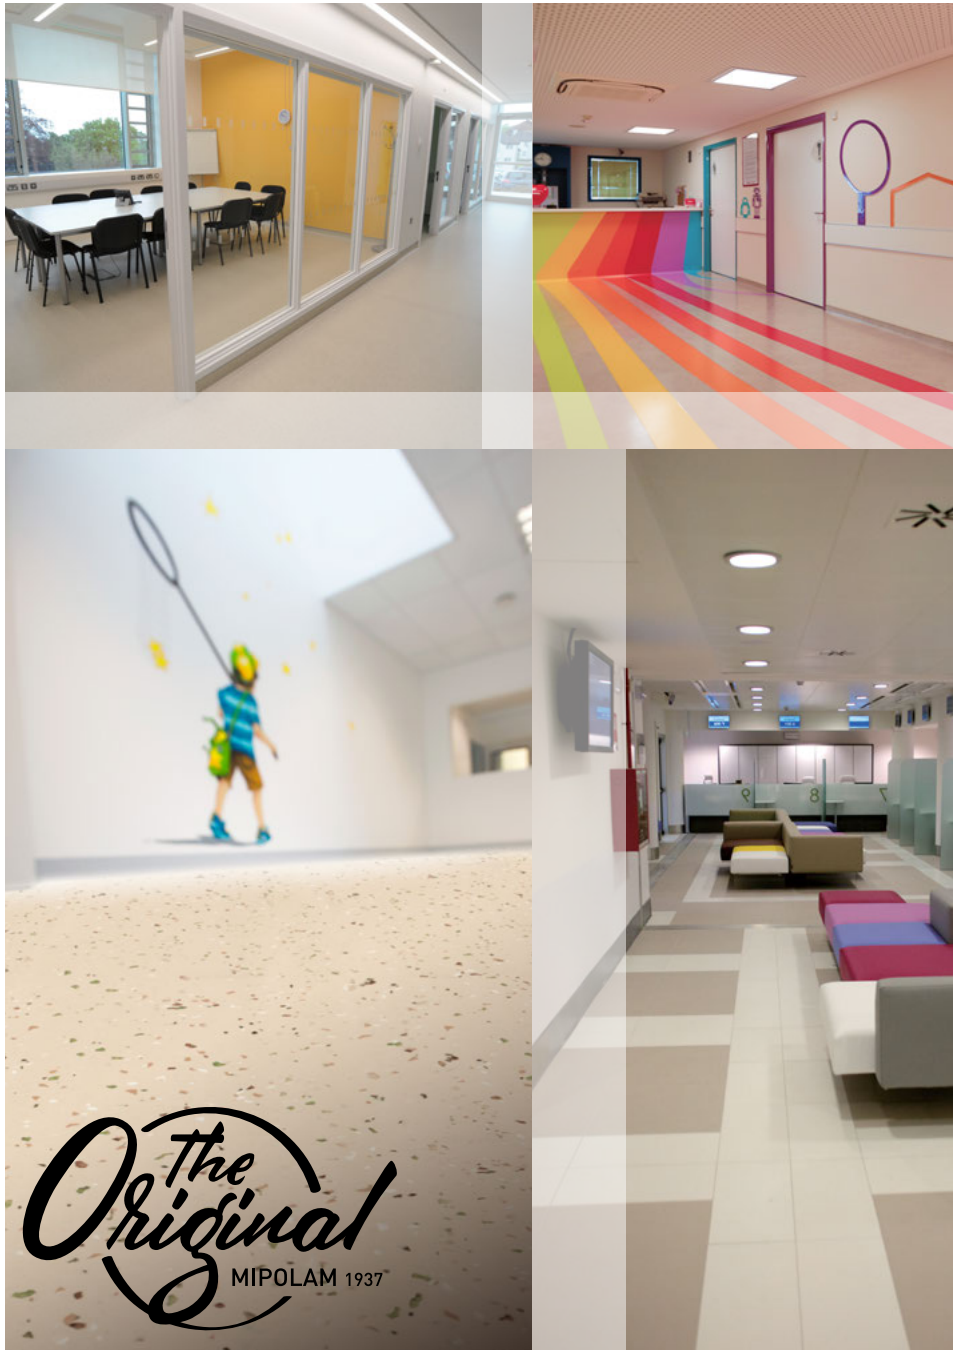

Gerflor
the flooring group

EXCLUSIVE SURFACE TREATMENT FOR ENHANCED PERFORMANCE IN HEALTHCARE

STAIN BARRIER
Unrivalled level of stain and chemical resistance

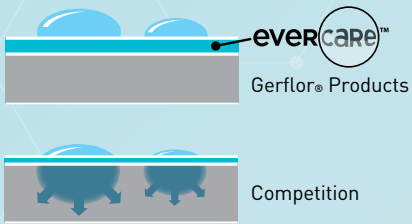

100% HYGIENIC
No contamination & bacteria development




HIGH PERFORMANCE
floorcovering for heavy traffic areas



evercare™
PATENTED TECHNOLOGY BY GERFLOR®


NO WAX FOR LIFE!
Easy to maintain with minimal environmental impact

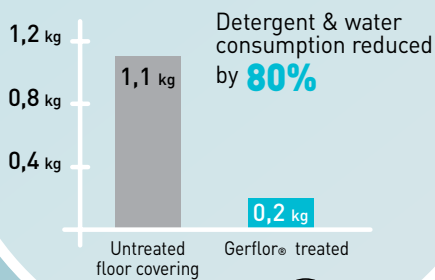


HIGHEST INDOOR AIR QUALITY

TVOC
<10
 $\mu\text{g}/\text{m}^3$
after 28 days

MIPOLAM® STYL




4019 Andante



4014 Dolce




4007 Crema



4003 Porpora



4020 Medio Verde



4011 Moderato




4010 Legato




4004 Rosa




4021 Grazioso




4015 Lento




4012 Light Ocre




4005 Lavande



4023 Turchese




4016 Mesto




4013 Sabbia




4006 Paprika



4022 Luce Blu




4017 Slate




4008 Frumento




4001 Sole




4024 Animato



4018 Mix Dark



4009 Cioccolato



4002 Safran



4025 Lago

MIPOLAM® STYL is a homogeneous pressed compacted floorcovering in sheet, with non-directional design, colour dyed as a raw mixture to ensure even color throughout the thickness and a matt finish. Its surface is densely compacted for improved wear and ease of maintenance.

It is treated with Evercare™, the latest improvement in polyurethane surface treatment obtained by UV laser crossing-linking. Evercare™ avoids staining of chemical products, like betadine, eosin, or anti-bacterial hand gel and increases the durability of the flooring. No wax for life!

MIPOLAM® STYL is available in 25 fashionable and relaxing colors, and incorporates bacteriostatic and fungistatic actions. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for very heavy traffic areas.

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

Using less acrylic emulsion for the entire lifetime of the product, maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

MIPOLAM® STYL

DESCRIPTION

Total thickness	ISO 24346 (EN 428)	mm	2.0
Weight	ISO 23997 (EN 430)	g/m ²	2630
Width of sheet	ISO 24341 (EN 426)	cm	200
Length of sheet	ISO 24341 (EN 426)	lm	20

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581(EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	<2
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	class	R9


PERFORMANCES

Abrasion resistance	EN 660.2	mm ³	<2.0
Abrasion group	EN 649	group	T
Type Binder content	ISO 10581	type	I
Dimensional stability	ISO 23999 (EN 434)	%	≤0.4
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	≈0.25
Colour fastness	ISO 105 - B02	degree	≥6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽¹⁾	ISO 22196	-	>99 % Inhibits growth
Anti-bacterial and fungicidal	-	-	OK
Surface treatment	-	-	Evercare™
Color number	-	-	25

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 10
Certification	-	-	Florescore®

CE MARKING

CE	EN 14041	-	
----	----------	---	---

⁽¹⁾ The implementation of an effective cleaning regime is the most important defence against infections.



Committed to sustainable development