

TARALAY™ ROMA

gerflor.com
gerflor.asia

NEW



Gerflor[®]
theflooringgroup

TARALAY™ ROMA




34-43

Protecsol®

Sanosol

100% recyclable

PROTECSOL®




1104 Cheese




1102 Cinnamon



1103 Ochre



1105 Rouge

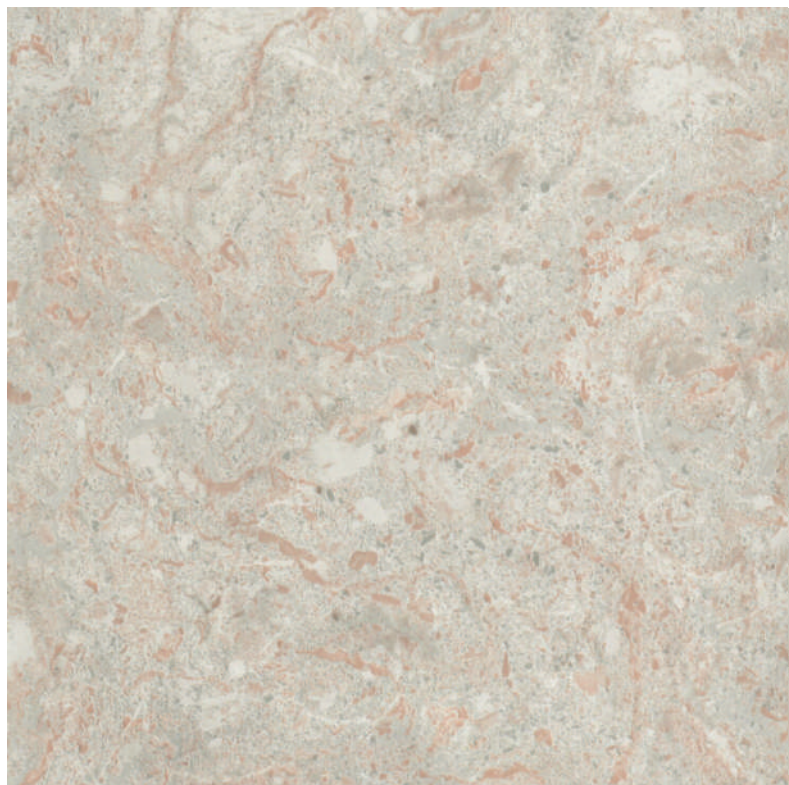

1101 Cream



* Welding rod available


TARALAY™ ROMA




34-43

Protecsol®


Sanosol

 100% recyclable

PROTECSOL®

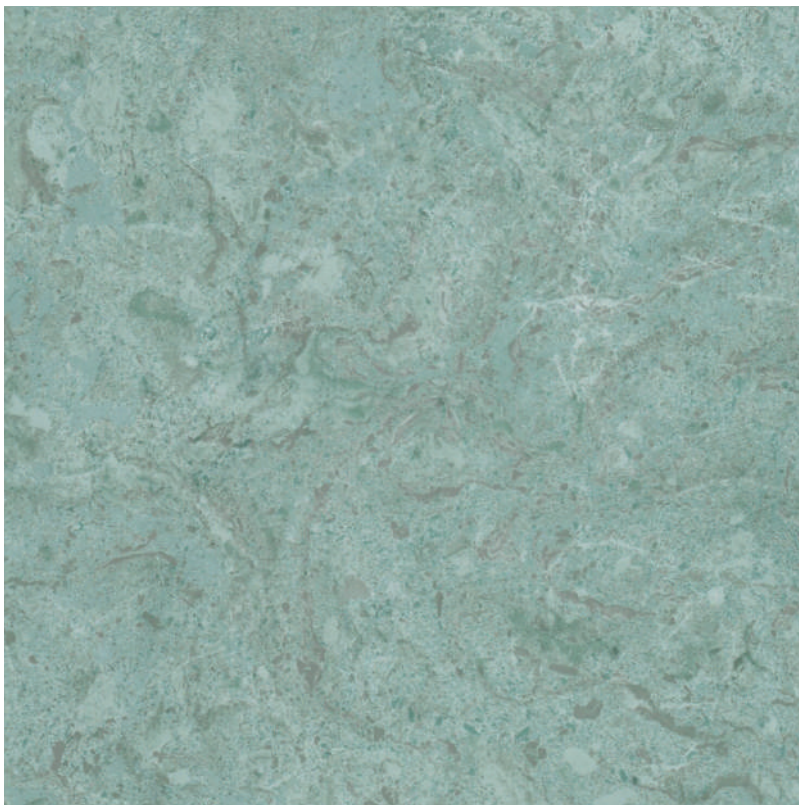


1107 Forest

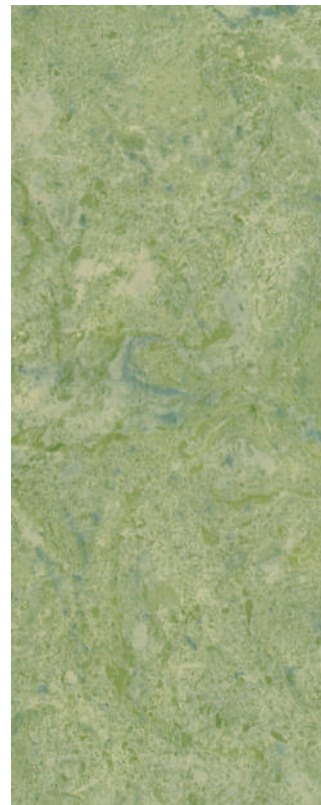


1106 Spring

THE
FRENCH
TOUCH




1111 Ciel




1112 Ocean



1108 Painting



1109 Mineral



1110 Ink

TARALAY™ ROMA



34-43

Protecsol®


Sanosol

100% recyclable

PROTECSOL®



TARALAY™ ROMA

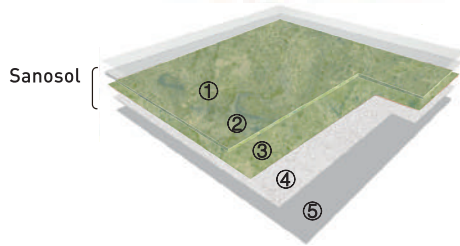

- ① Protecsol® surface treatment
- ② Transparent wear layer
- ③ Printed design
- ④ Fiber glass reinforced layer
- ⑤ Compact back layer

- Protecsol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning.
- Sanosol treated throughout the thickness to prevent bacterial and fungicidal contamination.
- Transparent wear layer with printed designing, highest durability.
- No DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, friendly to health and environment.
- Compact backing with fiber glass reinforced layer. High resistance to static and dynamic indentation under rolling loads, and excellent dimensional stability.
- Recommended for high traffic area in education, office, retail, hospital and institutional buildings.



Compact sheet, without foam backing

WOOD



6.6 cm



0404 FRONTENAC-Cream



10 cm



0405 WALNUT-Light Tan



10 cm



0406 WALNUT-Chocolate

TARALAY™ ROMA

FEWER VOC'S, BETTER INDOOR AIR QUALITY



COMPOSITION 100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS

Health

- Antibacterial activity (inhibits growth > 99 %)



INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements (TVOC <math>< 100 \mu\text{g}/\text{m}^3</math> after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLABILITY

- 100 % recyclable product



RECYCLED CONTENT


- 100 % REACH compliant recycled content

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24° C. All seams must be hot welded using Gerflor® matching welding rod.



MAINTENANCE

No acrylic emulsion (wax) is needed for life. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

 Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.



ROMA

DESCRIPTION			ROMA
Total thickness	ISO 24346 [EN 428]	mm	2.6
Wearlayer thickness	ISO 24340 [EN 429]	mm	0.7
Weight	ISO 23997 [EN 430]	g/m ²	3800
Width of sheet	ISO 24341 [EN 426]	cm	200
Length of sheet	ISO 24341 [EN 426]	lm	15
CLASSIFICATION			
Norm / Product specification	-	-	ISO 10582 [EN 649]
European classification	ISO 10874 [EN 685]	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2
Wear group	EN 649	group	T
Type binder content	ISO 10582	type	I
Dimensional stability	ISO 23999 [EN 434]	%	≤ 0.4
Residual indentation	ISO 24343-1 [EN 433]	mm	≤ 0.1
Castor chair test	ISO 4918 [EN 425]	-	OK
Thermal conductivity	ISO 10456 [EN 12524]	W/[m.K]	0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical product resistance	ISO 26987 [EN 423]	-	OK
Anti-bacterial and fungicidal treatment	-	-	Sanosol
Surface treatment	-	-	Protecsol®
Anti-bacterial activity (E.coli - S.aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 100
Certification	-	-	Floorscore®
CE MARKING			
		EN 14041	

[1] The implementation of an effective cleaning regime is the most important defence against infections.


TARALAY™ ROMA is a multilayered compact vinyl floor covering, available in 2m width sheet, with a group T wear rating. The product comprises a printed design protected by a transparent wear layer, and a compact backing with fiber glass reinforced layer, which resists static and dynamic indentation under rolling loads and provides excellent dimensional stability.

TARALAY™ ROMA is treated with Protecsol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning, no wax for life, and Sanosol treated throughout the thickness to prevent bacterial and fungicidal contamination. It has no DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for high traffic area in education, office, retail, hospital and institutional buildings.

Gerflor Don't forget our complementary ranges!



TARALAY™ ROMA, LESS SPEAKING FOR MORE ACTIONS

 <p>COMPOSITION 100% REACH compliant FREE of formaldehyde FREE of heavy metals FREE of solvent</p>	 <p>RECYCLED CONTENT 100% REACH compliant recycled content</p>	 <p>RECYCLABILITY 100% recyclable product</p>	 <p>INDOOR AIR QUALITY TVOC emissions between 10 and 100 times better than norms requirements Floorscore certified No formaldehyde emission</p>	 <p>INSTALLATION Innovative adhesive free installation systems</p>	 <p>WELLNESS Health: Antibacterial activity (inhibits growth > 99%)</p>
--	--	---	---	--	--

JUN 2018-06-30 Version - Indicative documentation cost RMB 20
Gerflor® has a policy of continuous product improvement. It reserves the right to change design and specifications without notice.

Be connected!



#Gerflor



www.gerflor.com

Gerflor
theflooringgroup

GERFLOR ASIA Tel.: + 86-21-63578818