

PREMIUM

gerflor.com



Gerflor[®]
theflooringgroup





PREMIUM, THE UNIQUE SOLUTION

- The proof is in the customer experience 04
- The best technologies in one 06
- Designs that exceed expectations 20
- A sustainable choice 38
- Gerflor services 40
- Technical data 42

PREMIUM

THE UNRIVALLED HIGH TRAFFIC SOLUTION


*The proof is in
the customer experience*



“ **With 600 000 passengers per year**, plus their luggage and carts, this floor covering offers the advantage of **standing up to heavy traffic** while remaining easy to maintain.
Pau-Pyrénées Airport, France ”

“ I realise every day Premium durability in comparison with a standard flooring: one is difficult to maintain, Premium is **clean and perfect**.
12 years old elementary school in Nurmo, Finland ”

“ **For 20 years**, this mass-coloured surface has **always been satisfactory**. We've had **no problem with tears, scratches or wheel marks**.
Hospital in Lons-le-Saunier, France ”



“ **After 10 years of intensive use,** Premium is still in excellent condition, which is something we are extremely pleased with. The same type of flooring has been used for other schools in our foundation, so we are in a good position to make a comparison.

Premium comes out on top, each and every time.

*Primary school De Meander in Ootmarsum,
Netherlands* //

“ We wanted a building that promotes employees health and encourages healthy lifestyles, a workplace that serves an exemplar of healthy work environment, **so we selected Premium as the best floor for indoor air quality.**

*Medibank Headquarters,
Melbourne, Australia* //

“ Premium flooring **is very resistant to chemical and mechanical attacks,** and this colour range is trendy.


*Städtisches Klinikum,
Solingen, Germany* //

PREMIUM

The best of both worlds !

In the resilient flooring market, **Premium** offers the best of 2 worlds:


- Homogeneous inlaid surface
- Multilayered construction

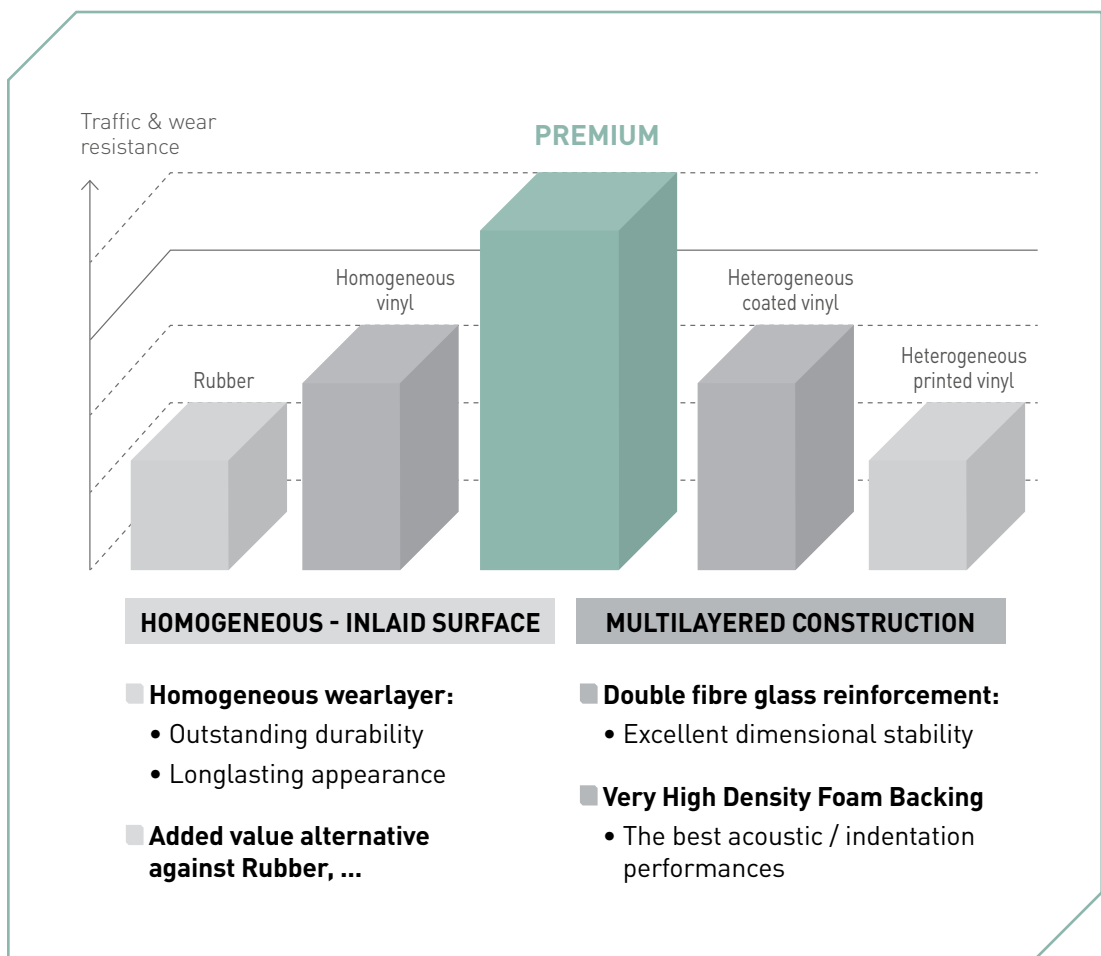

PREMIUM


Top of Gerflor ranges

In the Gerflor product portfolio, **Premium** is the top of homogeneous & multilayered ranges.

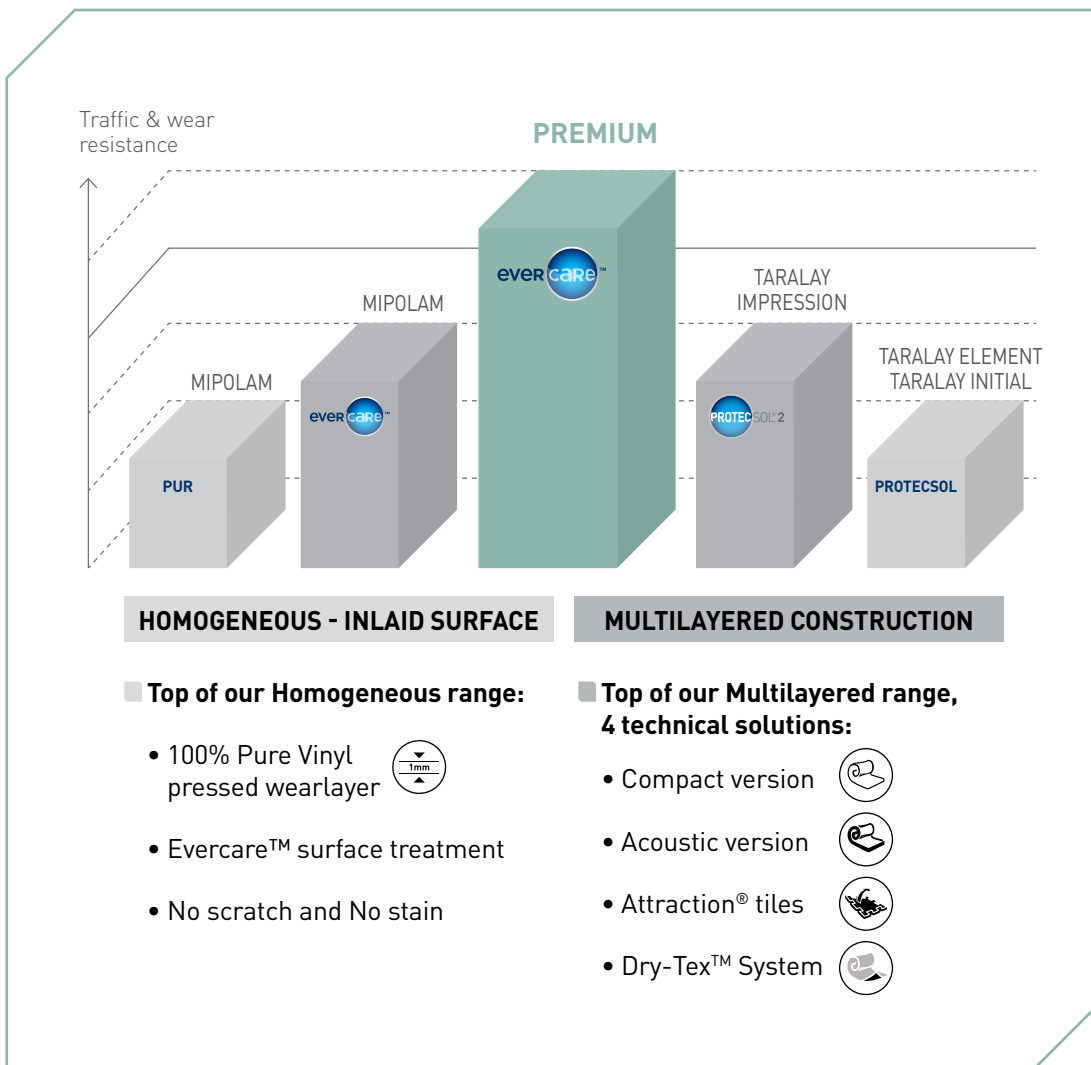

WHAT MAKES THIS FLOORING UNIQUE?

*The difference is
in the details*

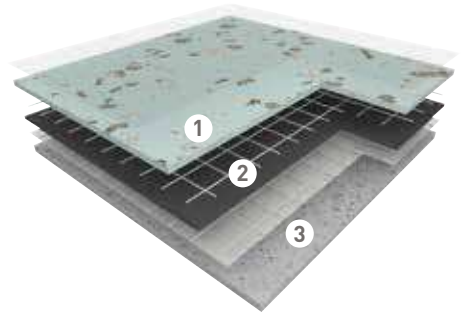

1 100% PURE VINYL PRESSED WEARLAYER

PREMIUM ⁽¹⁾



Cross-section


(1) Identical scale, enlarged 200 times

- > 1 mm
- Pressed under **800 tonnes**
- 100 % PVC
- No transparent wearlayer


OTHER FLOORING⁽¹⁾



Printed flooring with transparent wearlayer
Air bubbles: dirt traps



Homogeneous flooring
Fillers: fragile and subject to scratches



Coated flooring
Irregular density: dirt traps



Rubber flooring
Porous and elastic: lower wear resistance and difficult to maintain



| | Wear resistance | Scratch resistance | Soiling resistance | Colour durability | Yellowing effect resistance |
|----------------------|-----------------|--------------------|--------------------|-------------------|-----------------------------|
| PREMIUM | ★★★ | ★★★ | ★★★ | ★★★ | ★★★ |
| Printed multilayered | ★ | ★★ | ★ | ★★ | ★ |
| Homogeneous | ★ | ★ | ★★ | ★★ | ★★ |
| Coated multilayered | ★★ | ★★ | ★ | ★★ | ★★ |
| Rubber | ★ | ★★ | ★ | ★ | ★★ |

2 DOUBLE GLASS FIBER GRID REINFORCEMENT

PREMIUM



Perfect stability


OTHER FLOORING



Fragile veil: lower stability


3 VERY HIGH DENSITY FOAM

PREMIUM

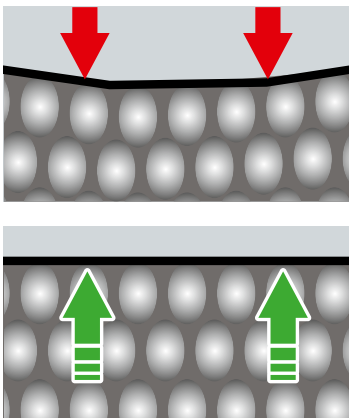

Closed and regular ovoid cells ease the roll of heavy loads

OTHER FLOORING

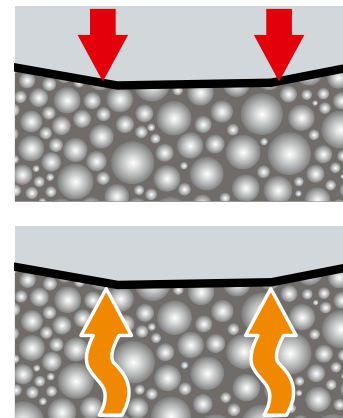

Irregular shaped and sized cells reduce the resistance to indentation



| | | Ease of rolling | Dimensional stability | Resistance to indentation |
|-----------------------|---|-----------------|-----------------------|---------------------------|
| PREMIUM | Double glass fiber grid Very high density foam | ★★★★ | ★★★★ | ★★★★ |
| Other flooring | Standard veil Standard foam | ★ | ★ | ★★ |



WHEN DESIGN MEETS THE BEST OF TECHNOLOGIES!

EVERCARE™ SURFACE TREATMENT
STAIN BARRIER & EASY MAINTENANCE & HYGIENE

HIGH DENSITY PRESSED WEARLAYER


PRESSED UNDER 800 TONS FOR AN **UNRIVALLED DURABILITY**

DOUBLE GLASS FIBER GRID
THE BEST DIMENSIONAL STABILITY

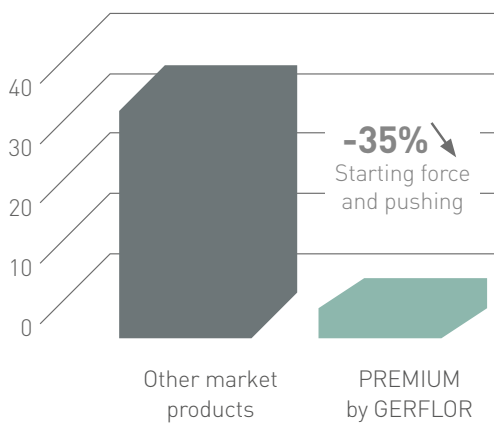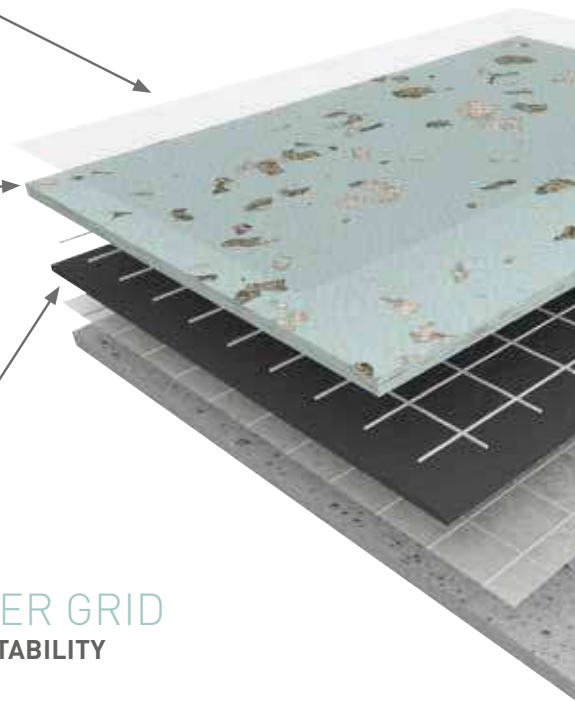

■ EASY ROLLING OF HEAVY LOADS

Premium floorings offer the best dynamic indentation: **starting force and pushing are reduced by 35% in comparison with other floorings.**

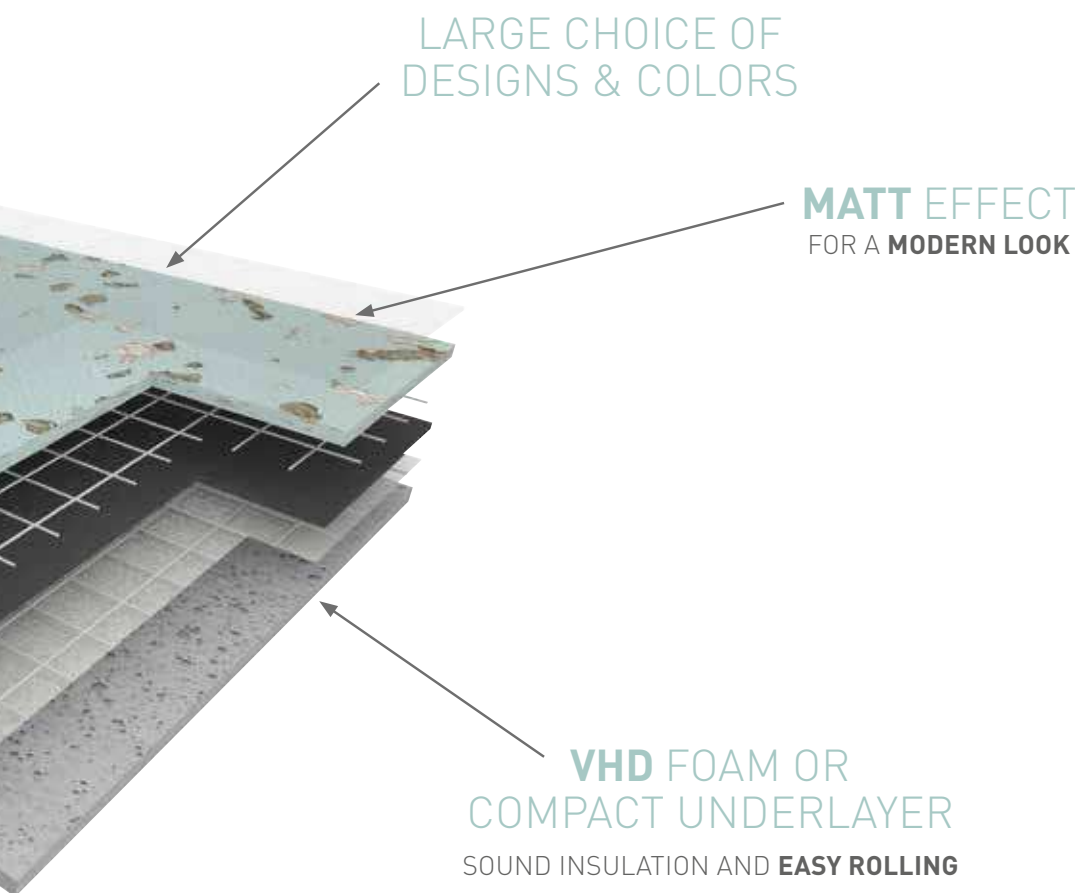

LARGE CHOICE OF
DESIGNS & COLORS

MATT EFFECT
FOR A **MODERN LOOK**

**VHD FOAM OR
COMPACT UNDERLAYER**
SOUND INSULATION AND **EASY ROLLING**



■ **THE BEST INDENTATION RESISTANCE /
ACOUSTIC PERFORMANCE**


Gerflor floorings offer a very good indentation and pressure point loading resistance (bed or furniture etc.)

Combined acoustic and walking comfort for calming and relaxing areas.



COMPACT VERSION
8dB

Indentation: 0.02 mm



COMFORT VERSION
17dB

(Metallica: 16dB)
Indentation: 0.06 mm



EASY MAINTENANCE


Proven efficiency




EVERCARE™ technology, an exclusive patented Technology by Gerflor: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus **3 additional benefits**:

1 STAIN SHIELD, BLOCKS EVEN THE TOUGHEST STAINS

Gerflor floorcovering with **EVERCARE™**



The **EVERCARE™** water-repellent effect prevents staining products from penetrating the materials (alcohol-based Eosin and Betadine, hydro-alcoholic gels, etc.), remaining on the surface.



Other floorcovering



All other product on the market let staining product penetrate the floor covering.



RESULTS AFTER CLEANING



| Using a neutral detergent or an eraser for marker | PREMIUM | Printed flooring / transparent wearlayer | Homogeneous flooring | Coated flooring | Rubber flooring |
|---|----------------|--|----------------------|-----------------|-----------------|
| After 10 min → | | | | | |
| After 1h → | | | | | |

Complete stain resistance table available on request

2 NO WAX REQUIRED


= SAVED WATER AND DETERGENT

10x less cleaning products to maintain Gerflor floor coverings compared with a non-treated floorcovering.

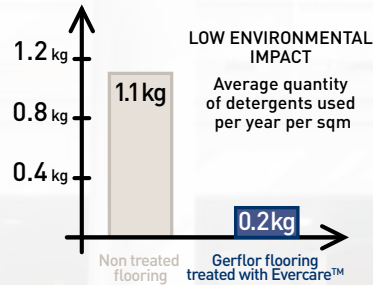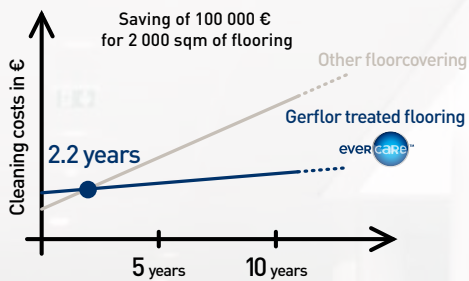

3 MATT EFFECT FOR A MODERN LOOK

The solution for high moisture subfloors

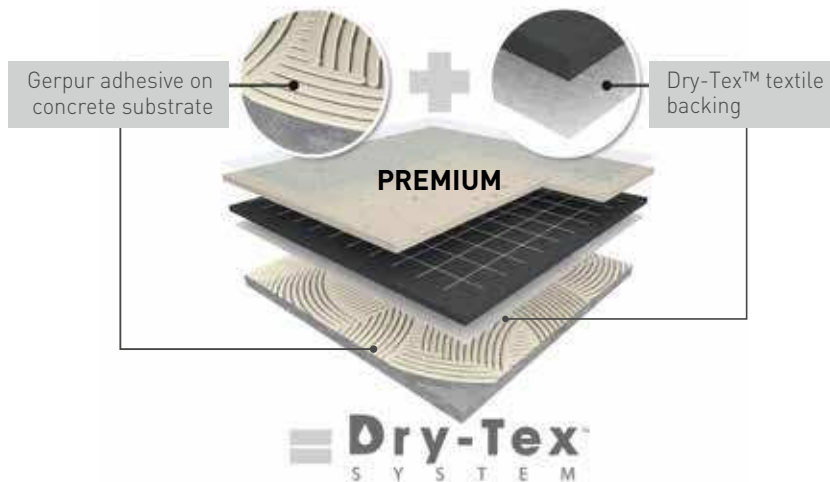


■ EMERGENCY DEPARTMENTS


- Reception areas
- Waiting rooms
- Corridors

■ HIGH MOISTURE SUBFLOORS


Proven resistance up to 98% RH / 15 lbs moisture according to ASTM F2170 & ASTM F1869

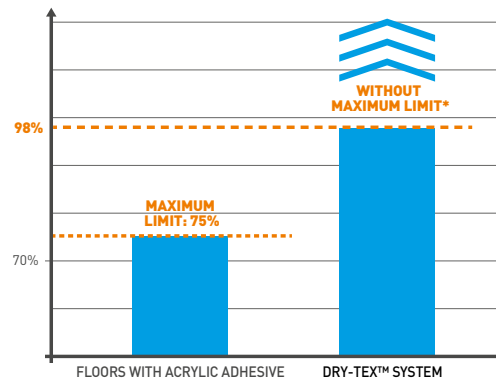

■ 4 REFERENCES AVAILABLE FROM STOCK




4343 Tokelau



8053 Anambas



4004 Pago



4003 Tao

All Premium Compact designs are available as Premium Dry-Tex™ for a minimum order quantity of 2400 sqm*

PREMIUM DRY-TEX™ is the best alternative to the installation of an interposition barrier which ensures:

Financial savings: up to 25% cheaper!

- Reduced labour and material cost

Time savings: a few minutes instead of several weeks!

- Reduced screed drying
- Reduced substrate preparation
- Easy installation

Performance

- Excellent moisture resistance
- Resistance to heavy traffic


Comfort and safety

- Easy rolling of beds and stretchers
- Slip resistance
- Acoustic insulation (compared to ceramic tiles)

ATTRACTION® TILES

The Premium solution for renovation



- **INSTALLATION ON ANY TYPES OF SURFACE***
- **SOLUTION FOR ASBESTOS SUBFLOOR** 
- **HARD-WEARING MODULAR TILES**



635 x 635 mm


- **FAST INSTALLATION: NO NEED TO STOP WORK**

* for further information please refer to our documentation "Attraction®"


■ REFERENCES AVAILABLE IN STOCK




BRAZILIA - 8577 Amazonas



BRAZILIA - 8157 Goias




INDIANA - 4146 Moheli




INDIANA - 4476 Wattaru




BRAZILIA - 3709 Ceara



BRAZILIA - 4342 Juara




BRAZILIA - 8386 Boa Vista




INDIANA - 4343 Tokelau



OSMOZ - 4351 Greige




INDIANA - 8053 Anambas




BRAZILIA - 8736 Recife




INDIANA - 4003 Tao



INDIANA - 4004 Pago




BRAZILIA - 3707 Paraiba



INDIANA - 8837 Songo


NEW DESIGN 6 NEW COLOR REFERENCES



NEOPOLIS - 2745 Plaza



NEOPOLIS - 2744 Queens Soft



NEOPOLIS - 2740 Harlem Soft



NEOPOLIS - 2742 Times Square



NEOPOLIS - 2743 Central Park



NEOPOLIS - 2744 Brooklyn

Attraction® tiles: **ask for a unit sample**. Technical data sheet & product description available on gerflor.com

COMPLETE SOLUTION

100% coordination floors / walls / finishes

■ 100% SAFETY

LINEA TOUCH handrail

■ 100% PROTECTION


Mural Ultra combined with LINEA punch bumper

■ 100% WATERPROOF

Perfect hot-welded joint between floor and wall

■ 100% HYGIENIC

- No areas where particles or bacteria can stagnate
- Easy to clean

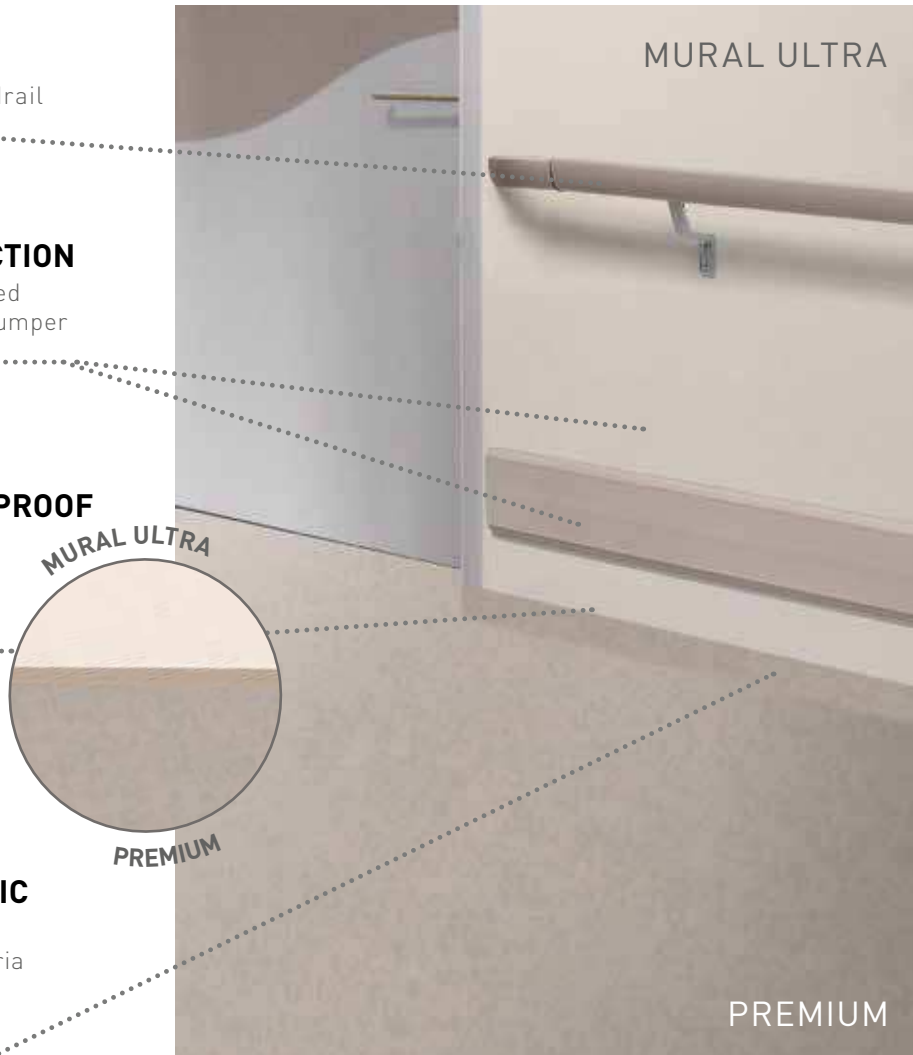


Patent pending system.




For further information, see the SPM and «Commercial flooring solutions» catalogues.

■ STAIRCASE SOLUTIONS

- Stair nosing
- 100% LANDING/
STAIR HARMONY**



PVC




ALU

- Complete step
- TARASTEP
17dB**



■ ACCESSIBILITY SOLUTIONS

- Warning strips
- Orientation strips



For further information, see the «A global solution for accessibility» brochure.

■ ROMUS ENTRANCE MATS

- Reduce dust
- Prevent premature soiling & wear of floor coverings




For further information, see the «Commercial flooring solutions» catalogue.


NEW PREMIUM COLLECTION

FOR AESTHETIC, SOOTHING
AND SMOOTH AREAS

Trendy colors and designs. Our Design Department works with a lot of designers, architects and colorists from all around the world to anticipate new decoration trends and to develop new designs and colors.

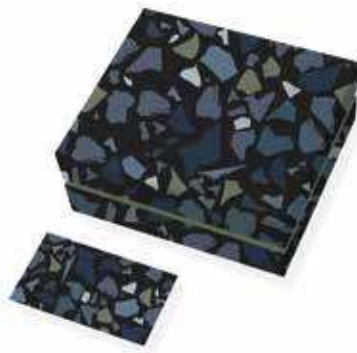

2 NEW DESIGNS BASED ON TERRAZO TREND



POESY

Random terrazo effect thanks to pearly and metallic flakes



NEOPOLIS

- Raw terrazo effect with neutral and very urban tones
- Transparence effect to bring depth and emphasis






135 REFERENCES

50% NEW


6 DESIGNS




Brazilia




Osmoz



Poesy



Metallica



Indiana




Neopolis


POESY



NEW STANDARDS
LIGHTNESS
POETIC SOFTNESS
ORIGINAL



7109 Idylle



2747 Ballade



2748 Refrain



2749 Lyrique



2752 Litote




8626 Rime



8627 Allegorie



8621 Ode



2750 Ellipse



2751 Slam



Compact sheet



Comfort sheet

NEOPOLIS



MASKING **EFFECT**
HIGHLIGHTING **RAW**
MATERIAL **UNEVEN URBAN**



2743 Central Park




2744 Queens Soft




2742 Times Square



2741 Brooklyn

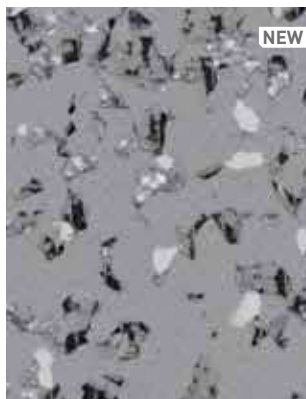

2740 Harlem Soft

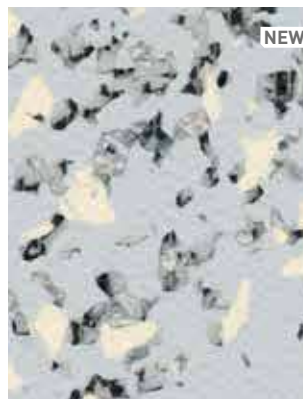

2745 Plaza



Compact sheet



Comfort sheet



Attraction


OSMOZ



**TONE-ON-TONE
UNIVERSAL NEUTRAL
SOOTHING EFFECT
ALMOST PLAIN COLOR**





NEW



4364 Ivory New  



NEW

4365 Alpaga New  




3792 Storm Grey  





3791 Slate Grey  



4350 Elefant  





4349 Angora  





4351 Greige   



NEW


7735 Coffee Brown  



8073 Cocoa  



NEW


7737 Pepper Grey 



NEW


0356 Denim 



4496 Pacific Blue 





NEW

7108 Grenadine  





NEW



0702 Kumquat  



NEW

7204 Mimosa 



4527 Bamboo  



Compact sheet



Comfort sheet



Attraction



METALLICA



METALLIC
EFFECT
3D


CRYSTAL
URBAN
POTENTIAL
ARCHITECTURAL



8059 Nicobar  




8150 Bali  




4343 Tokelau*   



8262 Rodrigues 






4009 Tufoa  





8226 Fidji  






8053 Anambas*   



3788 Nauru  




4002 Manua  





4001 Ofu  






7517 Faroe 







8470 Samoa  






8837 Songo   



4004 Pago*   



4003 Tao*   




4526 Lasia 






4469 Pemba  





8850 Maupiti  





4476 Wattaru   





4135 Aldabra 




4015 Guinea  




8256 Tahaa  



4142 Penang 



4146 Moheli   



8194 Kornati 



Compact sheet



Comfort sheet



Attraction

**Product available as Premium & Gerflor Dry-Tex System.*

INDIANA



CONTRAST
HARMONY
SOFT TEXTURE
FASHION COLORS



9745 Cosmic




9310 Tethys




9753 Energy



9330 Moon




8257 Nyx



2746 Ymir



8623 Sedna



8624 Triton



9719 Eclipse



8625 Naiade



Compact sheet



Comfort sheet


_____ BRAZILIA _____






ORIGINAL **LIGHT**
PREMIUM
STORY **CHEERFUL**
GRANITE EFFECT





3709 Ceara   




8736 Recife   



3734 Almerim  




8386 Boa Vista   






4342 Juara   




4329 Bacabal 



3707 Paraiba   





4478 Copacabana 





4477 Maceio  




8577 Amazonas  




8269 Ipanema 



8157 Goias  



4136 Sao Luis 



Compact sheet



Comfort sheet



Attraction


My Premium

Customize your floor!

1 SELECT A DESIGN TYPE



Brazilia



Indiana



Osmoz




Poesy



Neopolis

2 CHOOSE YOUR GRANULES: PALETTE

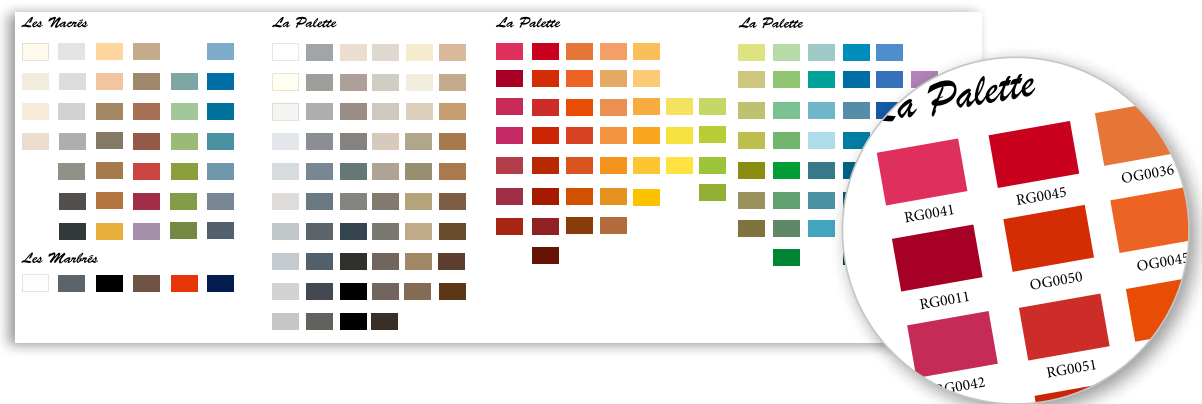

3 VISUALIZE YOUR DESIGN AND ORDER ONLINE ON

mypremiumbygerflor.com



My Premium
OFFER

Minimum order quantity:
2 000 sqm


My Premium
OFFER

Minimum order quantity:
2 000 sqm

My Premium

OFFER

Minimum order quantity:
2 000 sqm

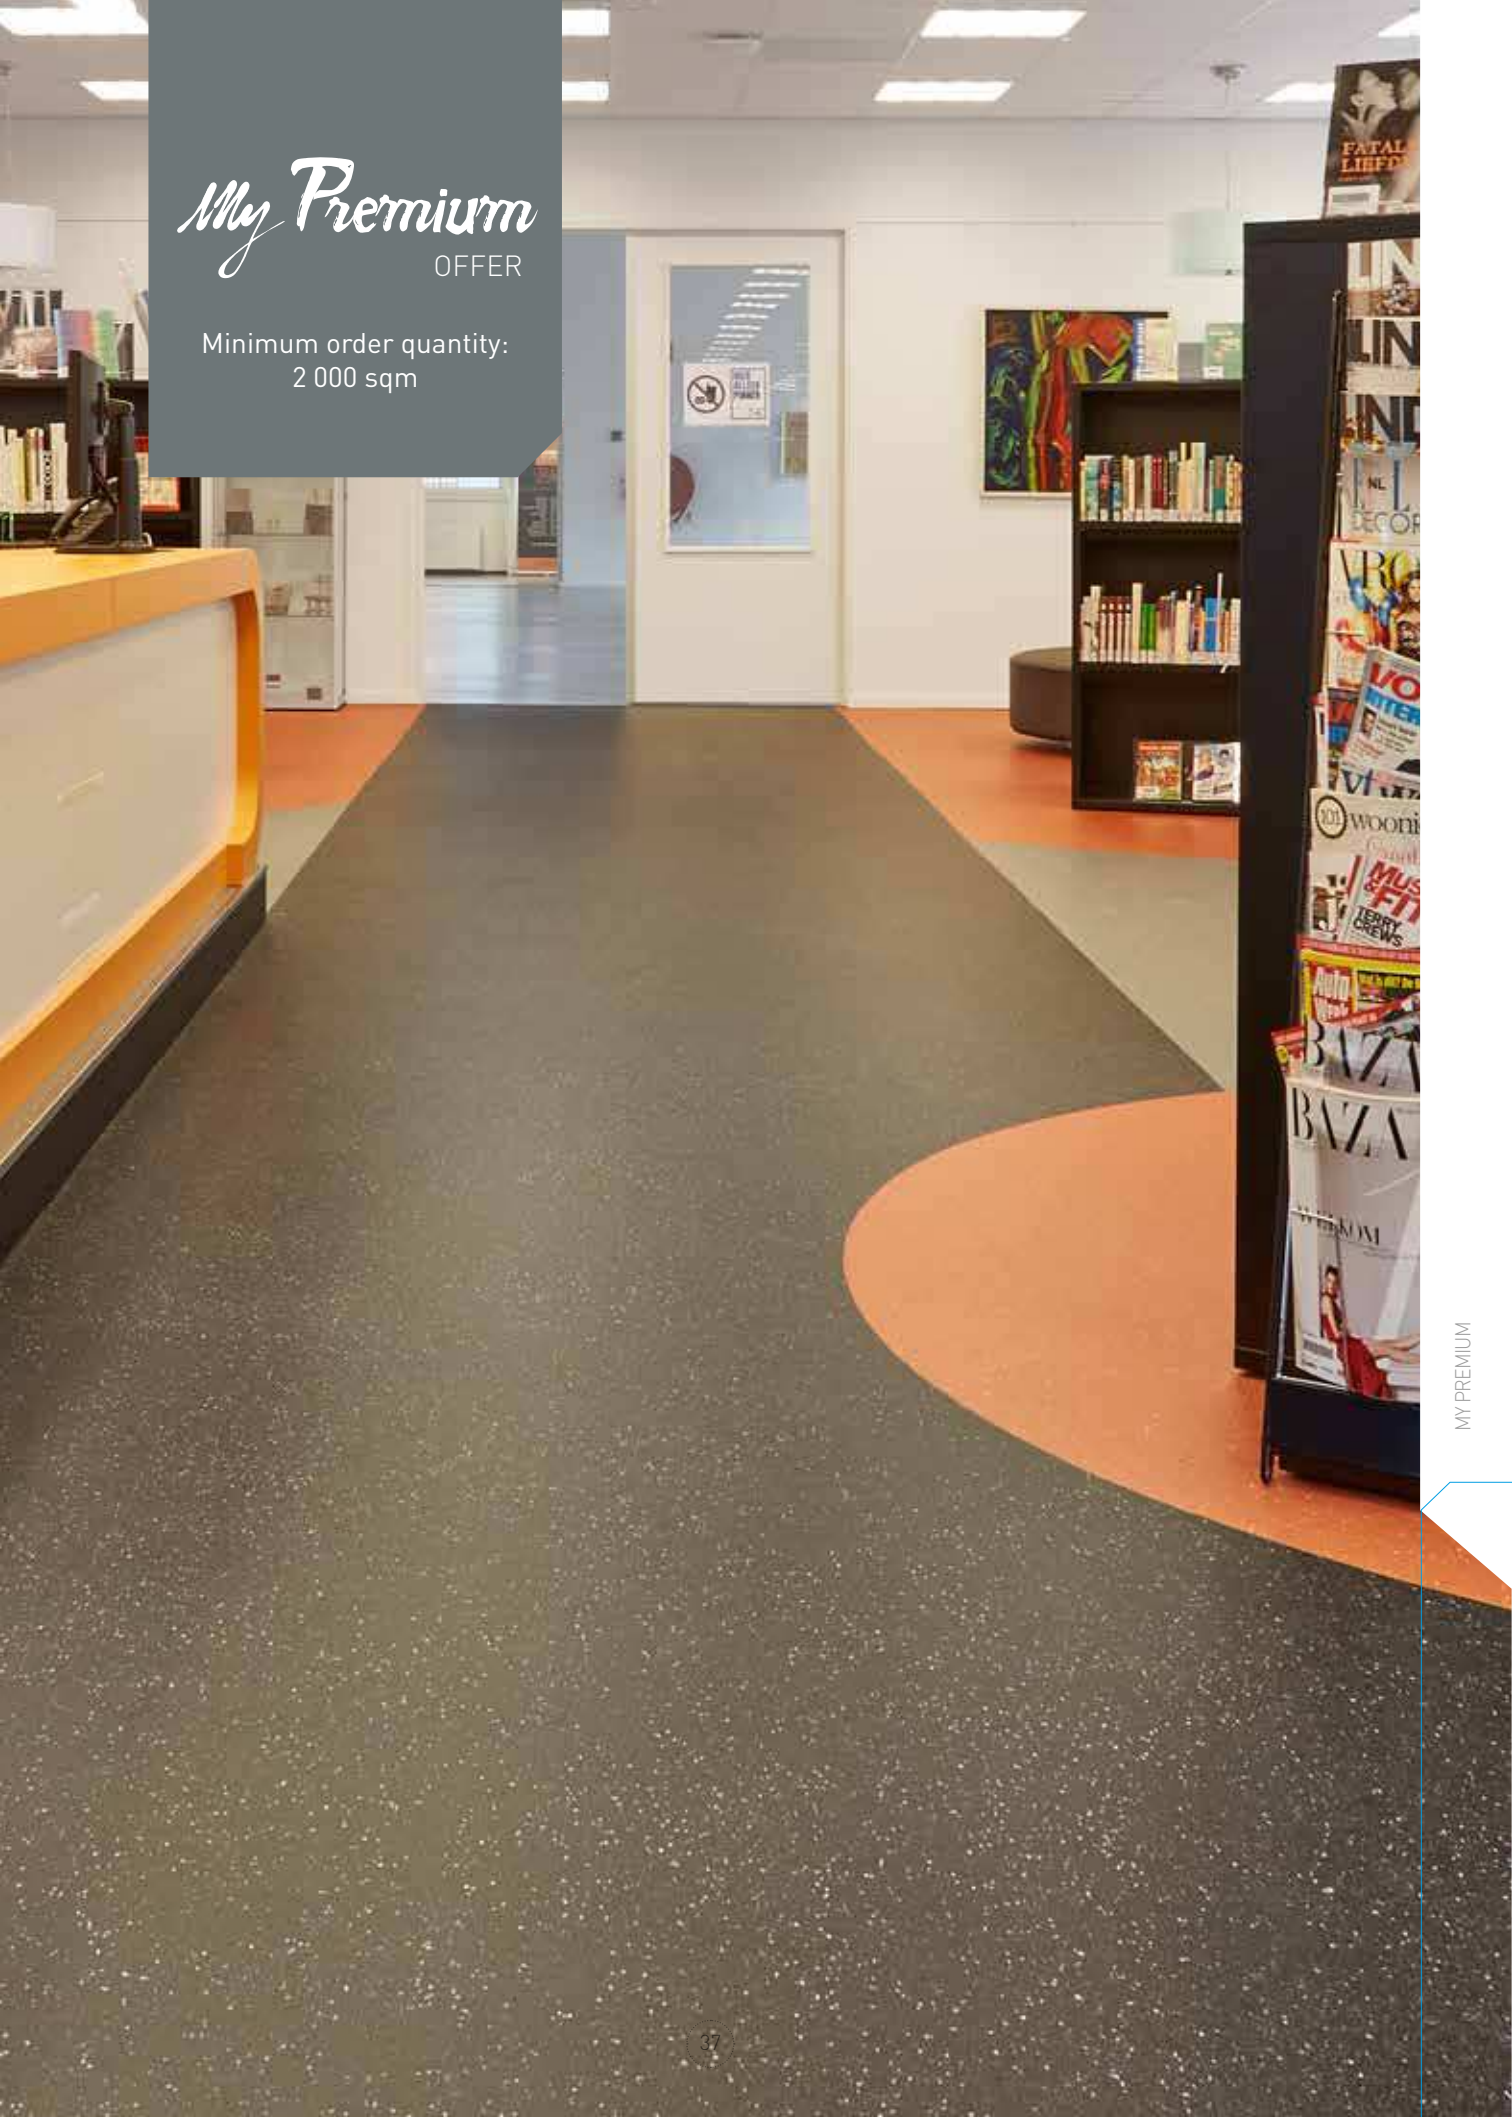

A SUSTAINABLE CHOICE



THE BEST INDOOR AIR QUALITY

- **VOC EMISSIONS < 10µg / m³ AFTER 28 DAYS**
→ 100 TIMES LOWER THAN NORM REQUIREMENTS

- **M1 AND FLOORSCORE CERTIFIED**

- **TESTED BY AN INDEPENDANT LAB**  **eurofins**

The lab confirmed the emissions are below detection levels!

ATTRACTION® <2 µg/m³ (TVOC after 28 days)

PREMIUM COMFORT <3 µg/m³ (TVOC after 28 days)



PRODUCT COMPOSITION

- **100% REACH COMPLIANT**
- **PHTHALATE FREE***



RECYCLING

- **100% RECYCLABLE**
- **MADE WITH 53% RECYCLED CONTENT**
(including post manufacturing and post consumer waste)



THE BEST LIFE CYCLE ANALYSIS

- **LESS WATER AND DETERGENT USE THANKS TO EVERCARE™**
- **LESS ENVIRONMENTAL IMPACT, LESS COSTS**

*except recycled content



indoor air quality

acoustic comfort

optimal hygiene

**ECO-FRIENDLY
PRODUCT**

A SUSTAINABLE
CHOICE

GERFLOR, THE PARTNER FOR ALL YOUR PROJECTS!



Make life easier!

WITH OUR EXPRESS DEPARTMENT

If you have technical questions
or would like to request samples
or documentation, contact:

By email: gerflorcontract@gerflor.com

By phone: **+33(0) 474 054 000**

By fax: **+33(0) 474 050 313**



Techno
centre

TRAINING CENTRE OPEN TO ALL PROFESSIONALS

Dedicated to training young professionals
and providing CPD for experienced
professionals.

CUSTOMIZED TECHNICAL SUPPORT


Our technicians will come to you to provide
on-site support.

ONLINE SERVICE

In just a few clicks, you'll find a whole range of tools to make your life easier on our website.

WELDING ROD AND FLOORING MATCHING TOOL

<http://www.gerflor.com/servicesprofessionals/welding-rods-matching.html>

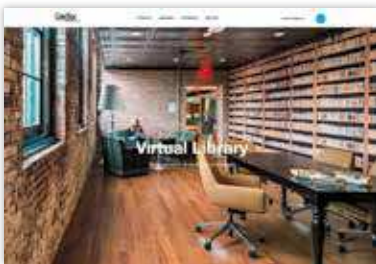

VIRTUAL LIBRARY

See our documentation on line

<http://www.gerflor.com/servicesprofessionals/virtual-library.html>

DESIGN STUDIO: REAL-TIME SIMULATIONS

Interior Designer

Choose your interior, insert your Gerflor floor covering and see the finished effect in situ on:

<http://www.gerflor.com/services/professionals/interior-designer.html>



CUSTOMISED FLOORINGS, LOGOS...

For more information
please contact your Gerflor
Representative








| | | | Taralay PREMIUM COMPACT | Taralay PREMIUM COMFORT | ATTRACTION® | Taralay PREMIUM DRY-TEX™ |
|--|--|--|---|---|-------------------------------|--|
| | | | Brazilia - Indiana - Metallica - Osmoz - Poesy - Neopolis | Osmoz - Indiana - Metallica - Brazilia - Poesy - Neopolis | Osmoz - Indiana - Brazilia | |

| DESCRIPTION | | | | | | |
|---------------------|-----------------------|-------------|-------------|-------------|---|------|
| Total thickness | EN ISO 24346 (EN 428) | mm | 2.00 | 3.00 - 3.30 | 5.00 | 2.50 |
| | ASTM F386-02 | inch | 0.08 | 0.12 - 0.13 | - | - |
| Wearlayer thickness | EN ISO 24340 (EN 429) | mm | >1 | >1 | 1.00 | 1.02 |
| | ASTM F410-02 | inch | ≥ 0.039 | ≥ 0.039 | - | - |
| Weight | EN ISO 23997 (EN 430) | g/sq.m | 2580-2680 | 2800-3260 | 7460 | 2660 |
| | - | lbs/sq.ft | 0.53 - 0.57 | 0.58 | - | - |
| Width of sheet | EN ISO 24341 (EN 426) | cm | 200 | 200 | - | 200 |
| | - | feet - inch | 6'6" | 6'6" | - | - |
| Length of sheet | EN ISO 24341 (EN 426) | lm | 20 | 25 | - | 20 |
| | - | feet - inch | 66' | 82' | - | - |
| Tile size | EN ISO 24342 (EN 427) | mm | - | - | 635 x 635 Connect 600 x 600 Cleantech (without dovetail) ^[4] | - |

| CLASSIFICATION | | | | | | |
|--------------------------------|-----------------------|-------|--------------------------|--------|--------------------------|--------------------------|
| Norm / Product specification | - | - | EN ISO 10582 (EN 649) | EN 651 | EN ISO 10582 (EN 649) | EN ISO 10582 (EN 649) |
| European classification | EN ISO 10874 (EN 685) | class | 34-43 | 34-42 | 34-43 | 34-43 |
| Fire rating | EN 13501-1 | class | Bfl-s1 | Cfl-s1 | Bfl-s1 | Bfl-s1 |
| Static electrical propensity | EN 1815 | kV | < 2 | < 2 | < 2 | < 2 |
| Slip resistance ^[1] | DIN 51 130 | class | R10 | R10 | R10 | R10 |

| PERFORMANCE | | | | | | |
|--|--------------------------|-----------------|---------------------------|---------------------------|-----------|---------------------------|
| Wear resistance | EN 660.2 | mm ³ | ≤ 2.0 | ≤ 2.0 | ≤ 2.0 | ≤ 2.0 |
| Wear group | NF 189 | group | T | T | T | T |
| Type binder content | EN ISO 10582 | type | I | - | I | I |
| Dimensional stability | EN ISO 23999 (EN 434) | % | ≤ 0.40 | ≤ 0.40 | ≤ 0.25 | ≤ 0.40 |
| Residual indentation (requirement) | EN ISO 24343-1 (EN 433) | mm | ≤ 0.10 | ≤ 0.20 | ≤ 0.10 | ≤ 0.10 |
| Residual indentation (measure) | - | mm | ≈ 0.02 | ≈ 0.06 | - | ≈ 0.03 |
| Impact sound insulation | EN ISO 717-2 | dB | 8 | 17 (Metallica: 16) | - | 8 |
| Castor chair test (type W) | ISO 4918 (EN 425) | - | OK | OK | OK | OK |
| Thermal conductivity | EN ISO 10456 (EN 12 524) | W/(m.k) | 0.25 | 0.25 | 0.25 | 0.25 |
| Colour fastness | EN 20 105 - B02 | degré | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 |
| Surface treatment | - | - | Evercare™ | Evercare™ | Evercare™ | Evercare™ |
| Chemical products resistance ^[2] | EN ISO 26987 (EN 423) | - | OK | OK | OK | OK |
| Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[3] | ISO 22196 | - | > 99 % inhibits growth | > 99 % inhibits growth | - | > 99 % inhibits growth |

| ENVIRONMENT / INDOOR AIR QUALITY | | | | | | |
|---|-------------|-------------------|-------------|-------------|-------------|-------------|
| TVOC after 28 days | ISO 16000-6 | µg/m ³ | <10 | <10 | <10 | <10 |
| Certification | - | - | Floorscore® | Floorscore® | Floorscore® | Floorscore® |

| CE MARKING | | | | | | |
|---|----------|---|--|---|---|--|
|  | EN 14041 |  |  |  |  | |

[1] Please refer to Tarasafe ranges.

[2] Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

[3] The implementation of an effective cleaning regime is the most important defence against infection.

[4] Available upon request

PREMIUM COMPACT

The floor covering is made of a **>1mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips**, with a **matt finishing and without a transparent wear layer**.

It offers a T group wear rating and is available in 2 m wide sheet.

Its compact backing is calendered, pressed and reinforced with a glass fibre grid yielding.

It offers a **8 dB sound insulation, an indentation resistance of 0.02 mm and a rolling heavy loads easiness**.

PREMIUM COMPACT is treated with **Evercare™**, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with more than 50% recycled content ; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6)**.

It is 100% recyclable.

PREMIUM COMFORT

The floor covering is made of a **>1mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips**, with a **matt finishing and without a transparent wear layer**.

It offers a T group wear rating and is available in 2 m wide sheet.

The product contains a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing. It is reinforced with a double glass fibre grid.

It offers a **16 dB sound insulation, an indentation resistance of 0.06 mm and a rolling heavy loads easiness**.

PREMIUM COMFORT is treated with **Evercare™**, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with more than 50% recycled content ; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6)**.

It is 100% recyclable.

| CODE | DESIGN | COLORS | LRV | NCS |
|------|-----------|--------------|------|-----------|
| 3734 | BRAZILIA | Almerim | 52,3 | 2000-N |
| 8577 | BRAZILIA | Amazonas | 44,0 | 2040-G70Y |
| 4329 | BRAZILIA | Bacabal | 25,9 | 4005-Y80R |
| 8386 | BRAZILIA | Boa Vista | 63,7 | 1002-Y50R |
| 3709 | BRAZILIA | Ceara | 30,4 | 4005-R80B |
| 4478 | BRAZILIA | Copacabana | 16,4 | 4030-B |
| 8157 | BRAZILIA | Goias | 29,8 | 2060-Y50R |
| 8269 | BRAZILIA | Ipanema | 47,3 | 2040-Y20R |
| 4342 | BRAZILIA | Juara | 52,5 | 2002-Y50R |
| 4477 | BRAZILIA | Maceio | 35,7 | 2030-B10G |
| 3707 | BRAZILIA | Paraiba | 10,1 | 7005-R80B |
| 8736 | BRAZILIA | Recife | 54,8 | 2005-R80B |
| 4136 | BRAZILIA | Sao Luis | 16,2 | 2060-Y80R |
| 4135 | INDIANA | Aldabra | 18,0 | 4020-R60B |
| 8053 | INDIANA | Anambas* | 22,9 | 5005-Y20R |
| 8150 | INDIANA | Bali | 39,2 | 3005-Y50R |
| 7517 | INDIANA | Faroe | 20,4 | 6010-G30Y |
| 8226 | INDIANA | Fiji | 35,6 | 3502-Y |
| 4015 | INDIANA | Guinea | 50,0 | 2030-G70Y |
| 8194 | INDIANA | Kornati | 11,7 | 1580-R |
| 4526 | INDIANA | Lasia | 41,5 | 1050-G |
| 4002 | INDIANA | Manua | 63,0 | 1502-B |
| 8850 | INDIANA | Maupiti | 35,2 | 2040-B |
| 4146 | INDIANA | Moheli | 13,9 | 3060-Y80R |
| 3788 | INDIANA | Nauru | 42,0 | 2502-Y |
| 8059 | INDIANA | Nicobar | 21,8 | 5010-Y60R |
| 4001 | INDIANA | Ofu | 88,7 | 0502-Y |
| 4004 | INDIANA | Pago* | 15,0 | 6502-B |
| 4469 | INDIANA | Pemba | 27,9 | 3040-B40G |
| 4142 | INDIANA | Penang | 23,5 | 1080-Y60R |
| 8262 | INDIANA | Rodrigues | 33,8 | 3020-Y30R |
| 8470 | INDIANA | Samoa | 12,3 | 7502-G |
| 8837 | INDIANA | Songo | 7,3 | 8000-N |
| 8256 | INDIANA | Tahaa | 56,5 | 1060-Y10R |
| 4003 | INDIANA | Tao* | 27,5 | 4502-B |
| 4343 | INDIANA | Tokelau* | 46,7 | 2005-Y50R |
| 4009 | INDIANA | Tufoa | 66,3 | 1005-Y20R |
| 4476 | INDIANA | Wattaru | 12,4 | 5030-R90B |
| 9745 | METALLICA | Cosmic | 28,4 | 5502-B |
| 9719 | METALLICA | Eclipse | 11,3 | 8502-B |
| 9753 | METALLICA | Energy | 56,3 | 2502-G |
| 9339 | METALLICA | Moon | 47,9 | 3005-Y50R |
| 8625 | METALLICA | Naiade | 19,2 | 4040-B |
| 8257 | METALLICA | Nyx | 28,0 | 4030-Y20R |
| 8623 | METALLICA | Sedna | 22,5 | 4030-G50Y |
| 9310 | METALLICA | Tethys | 28,1 | 4502-Y |
| 8624 | METALLICA | Triton | 16,8 | 7010-B90G |
| 2746 | METALLICA | Ymir | 23,9 | 5030-Y50R |
| 2741 | NEOPOLIS | Brooklyn | 14,9 | 7502-B |
| 2743 | NEOPOLIS | Central Park | 52,3 | 2005-Y30R |
| 2740 | NEOPOLIS | Harlem Soft | 30,0 | 4500-N |
| 2745 | NEOPOLIS | Plaza | 53,8 | 2002-B |
| 2744 | NEOPOLIS | Queens Soft | 29,4 | 4005-Y50R |
| 2742 | NEOPOLIS | Times Square | 14,9 | 7005-Y50R |
| 4365 | OSMOZ | Alpaga New | 52,2 | 2002-Y |
| 4349 | OSMOZ | Angora | 42,2 | 3005-Y50R |
| 4527 | OSMOZ | Bamboo | 49,4 | 1060-G50Y |
| 8073 | OSMOZ | Cocoa | 10,8 | 7005-Y50R |
| 7735 | OSMOZ | Coffee Brown | 16,9 | 6005-Y50R |
| 0356 | OSMOZ | Denim | 16,3 | 5030-R80B |
| 4350 | OSMOZ | Elefant | 33,1 | 3500-N |
| 4351 | OSMOZ | Greige | 25,8 | 5005-Y50R |
| 7108 | OSMOZ | Grenadine | 15,3 | 2070-Y90R |
| 4364 | OSMOZ | Ivory New | 61,1 | 1502-Y |
| 0702 | OSMOZ | Kumquat | 33,7 | 2050-Y50R |
| 7204 | OSMOZ | Mimosa | 61,7 | 1050-Y10R |
| 4496 | OSMOZ | Pacific Blue | 37,0 | 1040-B |
| 7737 | OSMOZ | Pepper Grey | 9,4 | 8000-N |
| 3791 | OSMOZ | Slate Grey | 21,7 | 5500-N |
| 3792 | OSMOZ | Storm Grey | 36,3 | 3502-B |
| 8627 | POESY | Allegorie | 24,8 | 3030-B10G |
| 2747 | POESY | Ballade | 43,8 | 2005-Y50R |
| 2750 | POESY | Ellipse | 45,1 | 2502-B |
| 7109 | POESY | Idylle | 34,2 | 3020-R10B |
| 2752 | POESY | Litote | 15,0 | 6502-B |
| 2749 | POESY | Lyrique | 16,6 | 6005-Y20R |
| 8621 | POESY | Ode | 50,0 | 1515-B50G |
| 2748 | POESY | Refrain | 28,8 | 4005-Y50R |
| 8626 | POESY | Rime | 20,3 | 5020-B |
| 2751 | POESY | Slam | 30,7 | 4500-N |

* Colors available as Gerflor Dry-Tex™ System

Gerflor International

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

Gerflor

Be connected!



www.gerflor.com

#Gerflor

Réalisation : coco & co - Premium - 06/2018

PREMIUM, **FEWER VOC'S, BETTER INDOOR AIR QUALITY**



COMPOSITION

100% REACH
Phthalate free
(except recycled content)



RECYCLABILITY

100%



INDOOR AIR QUALITY

100 times lower than
norm requirements
(TVOC < 10ug/m³
after 28 days)



LCA

Eco-designed according
to a product-specific
life cycle analysis



WELLNESS

Anti slip R10
Comfort version:
Walking comfort
< 65 dB (best certification)
and impact sound
insulation - 17 dB